

light on your work


X-START

6X160W LED - 9M 



TRIME

Lighting Tower Specialist



X-START

6X160W LED - 9M **Kubota**


Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-START LED has been created beginning from these characteristics. It is the best solution to your needs and guarantees 4200 sqm of illuminated area. 18 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.



- Multi-directionally adjustable and tiltable floodlights
- 7 sections vertical tower 8,5 m, 340° rotatable
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 18 units per truck
- Central lifting eye, forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Certified wind stability up to 80 km/h
- 5 height adjustable stabilizers
- On board levels for guidance during stabilization

APPLICATIONS

- Special events
- Rural & hard to reach areas
- Emergency response
- Construction & work sites
- Gas, oil & mining operations
- Military applications

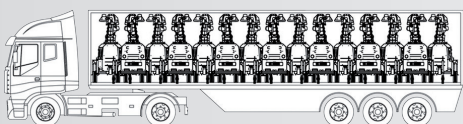

18
Units Per Truck



You can place 18 units on a single vehicle thanks to one of the compactest footprints on the market.

KEY BENEFITS

✔ *Easy to move*

✔ *Robustness*

✔ *Safety*

✔ *Cost effective*



LED TECHNOLOGY

SAFETY VERTICAL MAST

GALVANIZED BODY
DURABLE ANTI-CORROSION
PROTECTION

4 ADJUSTABLE STABILIZERS

FORK LIFT POCKET

town construction site
AD building maintenance
WARNING
repairing property
tower structure
progress forbidden
industrial
repairing site
downtown
building site
progress town
essing

technical data

Dimensions & weight

Dimensions min. (mm)	1830x1370x2560
Dimensions max. (mm)	24320x2570x8500
Total weight without fuel	695 Kg

Features

Rotation	340°
Floodlights	6x160W
Lamps	LED
Options	Homologated road trailer

Alternator


Model	Synchronous
Frequency (Hz)	60
Insulation class	H
Degree of protection	IP23
Single phase voltage	3,5 kVA - 230V
Auxiliary outlets	1 kVA

Engine

Model	Kubota Z482
Fuel	Diesel
r.p.m	1800
Tank capacity (l)	80
Consumption (l/h)	0,65
Running time (h)	123
Noise level (dBA) at 7m	65

Standard load delivery



18 sets



Units Per Truck

Illuminated area

4200 sqm

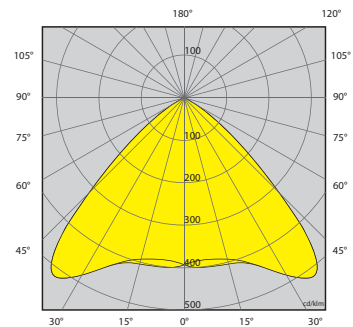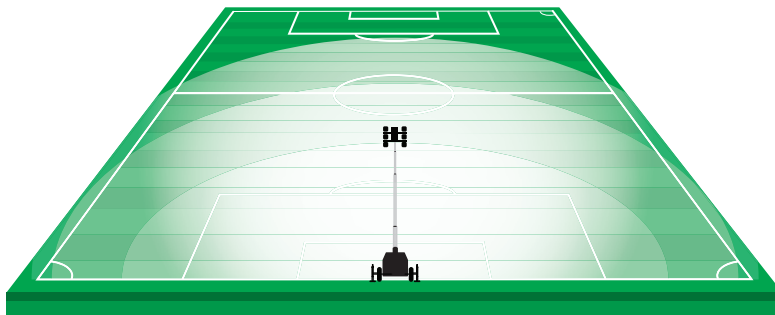

Lighting Tower **Specialist**

TRIME s.r.l.

Strada per Robecco, snc
 20081 Cassinetta di Lugagnano (MI) - Italy
 Tel. +39 02 942 1724
 Sales Dept. +39 0382 406 252
 www.trime.it - info@trime.it